



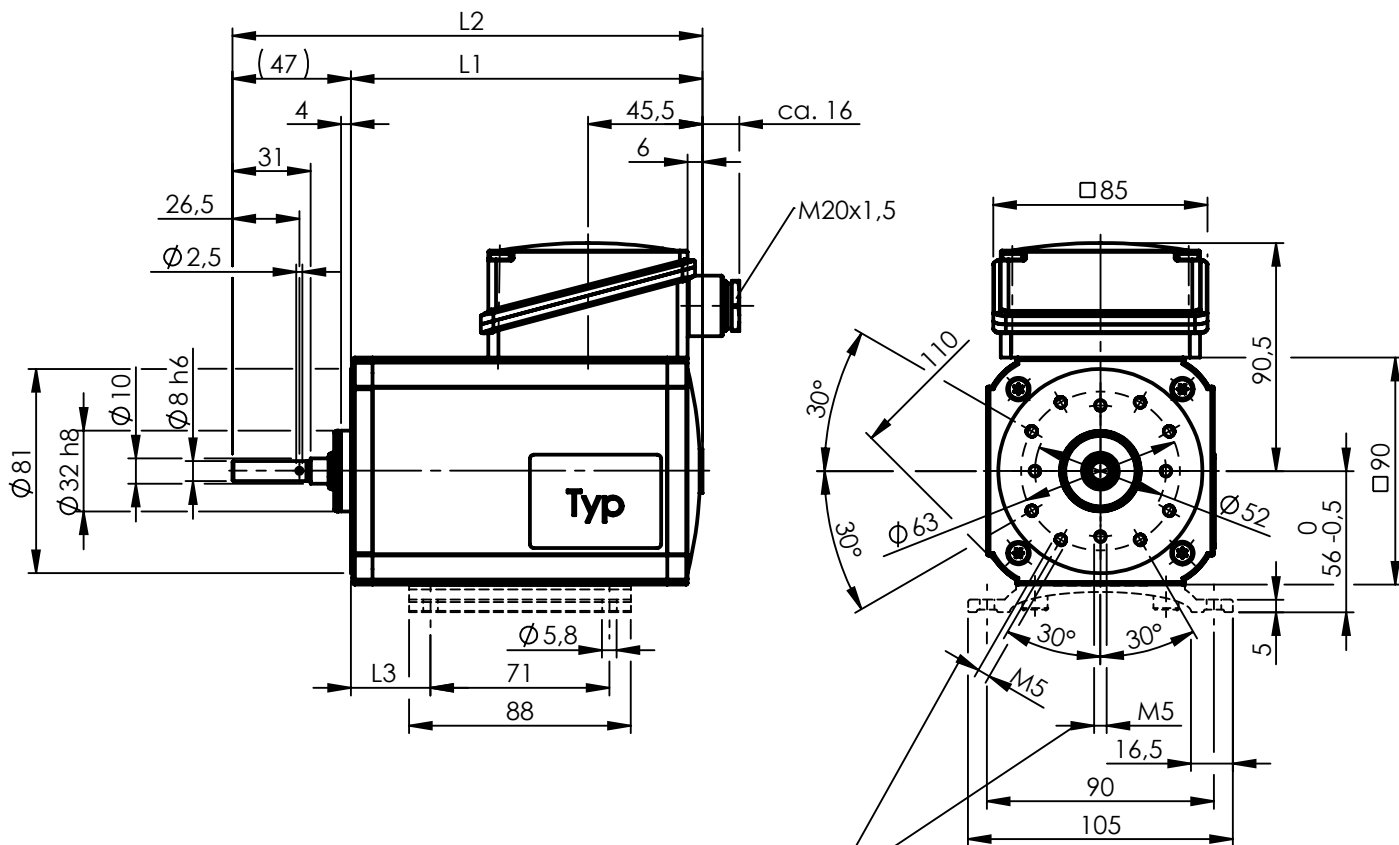

Einschraubtiefe 7 max.
Maximum thread depth 7 mm
Profondeur taraudage 7 mm maxi

Fuß optional möglich.
Foot possible.
Pied possible.
Anzugsmoment: 6^{+2} Nm
starting torque: 6^{+2} Nm
couple de serrage: 6^{+2} Nm

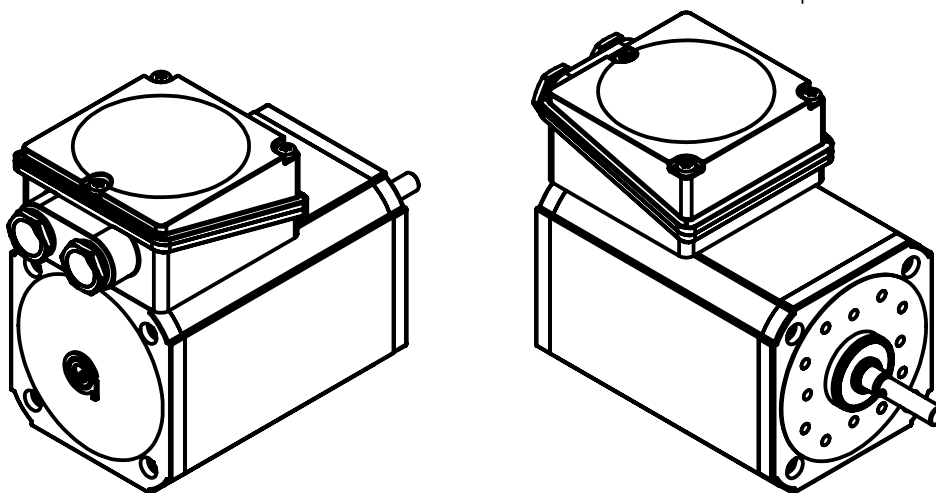

Maße ohne Toleranzangabe unverbindlich / Dimensions are in mm and for reference only / Cotes d'encombrement (en mm)

IGKU80-60	139,5	186,5	31,5	3,6
IGKU80-40	119,5	166,5	21,5	2,9
Typ	L1	L2	L3	Gewicht Weight Masse (kg)